


# CC8V-T1A

## Tuning Fork Crystal 32.768 kHz



### DIMENSIONS

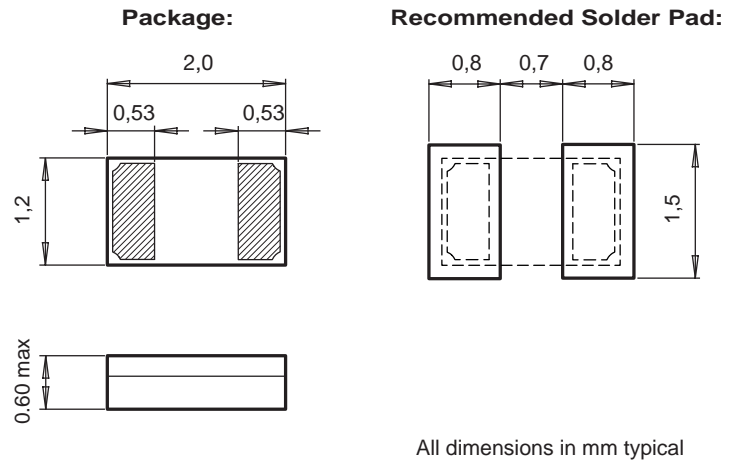

### APPLICATIONS

Metering  
Industrial  
Automotive  
Health Care  
Medical Implantable

### DESCRIPTION

The CC8V-T1A is a low frequency SMT Quartz Crystal Unit that incorporates a tuning fork Quartz Crystal Resonator. It operates under vacuum in a hermetically sealed ceramic package with ceramic lid.

### FEATURES

Outstanding hermetic sealing with gold-tin preform.  
High stability and low aging guaranteed by hermetic sealing.  
Available for extended operating temperature range.  
Small size, low profile, lightweight (5.5 mg).  
High shock and vibration resistant.  
100% Pb-free, RoHS-compliant.

### ELECTRICAL CHARACTERISTICS AT 25°C

| Standard Frequencies<br>32.768 kHz / 100.000 kHz <sup>1)</sup> | F <sub>L</sub>    | 32.768   | kHz |
|--|-------------------|--|-----|
| Load capacitance <sup>2)</sup>                                 | C <sub>L</sub>    | 4.0 / 6.0 / 7.0 / 9.0 / 12.5                                       | pF  |
| Frequency tolerance <sup>3)</sup>                              | ΔF/F              | ±20  | ppm |
|  | ΔF/F              | ±100   | ppm |
| Series resistance typ./max.                                    | R <sub>S</sub>    | 60 / 80  | kΩ  |
| Motional capacitance typ.                                      | C <sub>1</sub>    | 4.0  | fF  |
| Static capacitance typ.  | C <sub>0</sub>    | 1.2  | pF  |
| Drive level max.   | P                 | 0.5  | μW  |
| Insulation resistance min.                                     | R <sub>i</sub>    | 500  | MΩ  |
| Aging first year max.  | ΔF/F              | ±3   | ppm |
| Turnover temperature   | T <sub>0</sub>    | 25 ±5  | °C  |
| Frequency vs. temperature                                      | ΔF/F <sub>0</sub> | -0.035 ppm/°C <sup>2</sup> (T - T <sub>0</sub> ) <sup>2</sup> ±10% |     |

- 1) Other frequencies on request.  
2) Other load capacitances on request.  
3) Tighter frequency tolerances on request.

**STANDARD FREQUENCIES**

| Standard Frequencies         |
|------------------------------|
| 32.768 kHz / 100.000 kHz     |
| Other frequencies on request |

**ENVIRONMENTAL CHARACTERISTICS**

|                                |      | Conditions             | Max. Dev. |
|--------------------------------|------|------------------------|-----------|
| Storage temp. range            |      | -55 to +125°C          |           |
| TA Operating temperature range |      | -40 to +85°C           |           |
| TB Extended oper. temp. range  |      | -40 to +125°C          |           |
| TC Extended oper. temp. range  |      | -55 to +125°C          |           |
| Shock resistance               | ΔF/F | 5000 g, 0.3 ms, ½ sine | ±5 ppm    |
| Vibration resistance           | ΔF/F | 20 g / 10–2000 Hz      | ±5 ppm    |

**TERMINATIONS AND PROCESSING**

| Type     | Termination                              | Processing                                |
|----------|--|---|
| CC8V-T1A | For SMT mounting<br>Au flashed pads      | IPC/JEDEC J-STD-020C<br>260°C / 20 - 40 s |
| CC8V-T2A | SnPb plated pads<br>available on request | IPC/JEDEC J-STD-020C<br>260°C / 20 - 40 s |

**ORDERING INFORMATION**

|  |  |             |                                     |             |                                     |
|--|--|-------------|-------------------------------------|-------------|-------------------------------------|
| <b>C C 8 V - T 1 A 32.768 kHz 12.5 pF ±20 ppm TA QC</b>  |  |             |                                     |             |                                     |
| <p><b>Ceramic package</b> _____</p> <p><b>Ceramic lid</b> _____</p> <p><b>Package size</b> _____<br/>8 = 2.0 x 1.2 x 0.65 mm</p> <p><b>Tuning fork</b> _____</p> <p><b>SMT Package</b> _____</p> <p><b>Pads</b> _____<br/>1 = Au flashed pads<br/>2 = SnPb plated pads</p> <p><b>Pads on both ends</b> _____</p> | <p><b>Frequency <math>F_L</math></b> _____</p> <p><b>Load capacitance <math>C_L</math></b> _____<br/>4.0 pF, 6.0 pF<br/>7.0 pF<br/>9.0 pF<br/>12.5 pF<br/>Other <math>C_L</math> on request</p> <p><b>Frequency tolerance</b> _____<br/>±20 ppm<br/>±100 ppm<br/>Tighter freq. tolerances on request</p> <p><b>Temperature range</b> _____<br/><b>TA</b> = -40 to +85°C (Standard)<br/><b>TB</b> = -40 to +125°C<br/><b>TC</b> = -55 to +125°C</p> <p><b>Qualification</b> _____<br/><b>QC</b> = Commercial Grade (Standard)<br/><b>QM</b> = Medical Grade</p> |             |                                     |             |                                     |
| <p>A unique part number will be generated for each product specification, i.e:</p> <table border="1"> <tr> <td>20xxxx-MC01</td> <td>1'000 pcs (in 8 mm tape on 7" reel)</td> </tr> <tr> <td>20xxxx-MC03</td> <td>3'000 pcs (in 8 mm tape on 7" reel)</td> </tr> </table>   |  | 20xxxx-MC01 | 1'000 pcs (in 8 mm tape on 7" reel) | 20xxxx-MC03 | 3'000 pcs (in 8 mm tape on 7" reel) |
| 20xxxx-MC01  | 1'000 pcs (in 8 mm tape on 7" reel)  |             |                                     |             |                                     |
| 20xxxx-MC03  | 3'000 pcs (in 8 mm tape on 7" reel)  |             |                                     |             |                                     |

All specifications subject to change without notice.

