



## OPERATING CONDITIONS / ELECTRICAL CHARACTERISTICS

PARAMETERS	CONDITIONS	ECS-.327-CDX-0746			UNITS
		MIN	TYP	MAX	
Frequency	F <sub>o</sub>		32.768		KHz
Frequency Tolerance	@ +25°C			± 20	ppm
Load Capacitance			12.5		pF
Drive Level	D <sub>L</sub>		0.1	1.0	µW
Equivalent Series Resistance	R <sub>1</sub>			70K	Ω
Turnover Temperature		+20	+25	+30	°C
Temperature Coefficient		-0.028	-0.034	-0.04	ppm/°C <sup>2</sup>
Shunt Capacitance	C <sub>0</sub>		1.05		pF
First Year Aging	+25°C ±3°C			± 3	ppm
Operating Temperature	T <sub>opr</sub>	-40		+85	°C
Storage Temperature	T <sub>stg</sub>	-55		+125	°C
Insulation Resistance	@ 100V DC	500M			Ω

## TOP, BOTTOM, SIDE VIEWS & LAND PATTERN

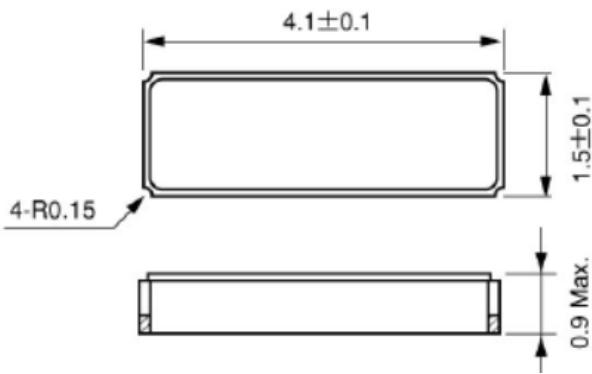


Figure 1) Top and Side View

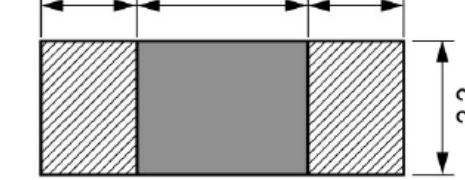
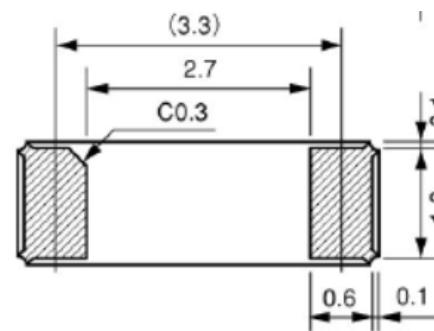


Figure 2) Bottom View and Suggested Land

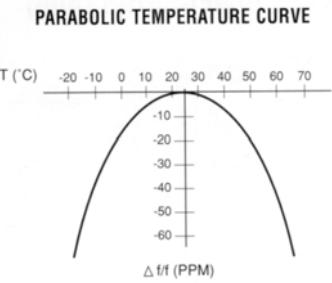


Figure 3) Parabolic Temp Curve

PART NUMBER: ECS-.327-CDX-0746



冠杰电子



0755-27839151



guanjiiedz@163.com



www.guangjiiedz.com

