


OC Type 7.0 x 5.0 mm SMD Crystal Oscillator

FEATURE

- Typical 7.0 x 5.0 x 1.3 mm ceramic SMD package.
- Output frequency up to 166MHz
- Tr-state enable/disable.


TYPICAL APPLICATION

- xDSL, WLAN, Fiber/10G-Bit Ethernet
- Notebook, PDA
- PC main board, VGA card

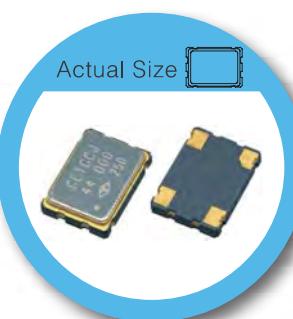


RoHS Compliant

DIMENSION (mm)

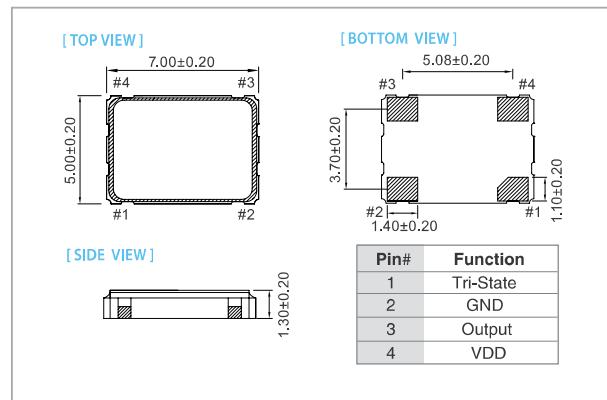

SOLDER PAD LAYOUT (mm)

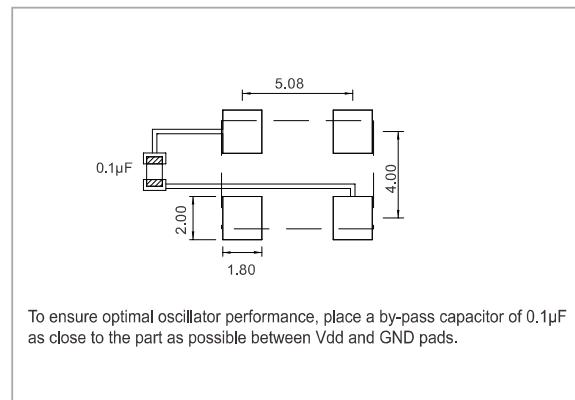

ELECTRICAL SPECIFICATION

Parameter	3.3V		2.5V		1.8V		unit	
	Min.	Max.	Min.	Max.	Min.	Max.		
Supply Voltage Variation(VDD)	VDD-10%	VDD+10%	VDD-10%	VDD+10%	VDD-10%	VDD+10%	V	
Frequency Range	0.0137	166	0.0137	133	0.0137	125	MHz	
Standard Frequency	2.048, 25, 26, 27, 50, 66, 667, 100, 125							
Supply Current	13.7 kHz \leq Fo \leq 70 kHz 0.3125 MHz \leq Fo < 35.328 MHz (A1) 30 MHz \leq Fo < 75 MHz 75 MHz \leq Fo < 133 MHz 133 MHz \leq Fo							
13.7 kHz \leq Fo \leq 70 kHz	—	1	—	1	—	1	mA	
0.3125 MHz \leq Fo < 35.328 MHz (A1)	—	10	—	8	—	7		
30 MHz \leq Fo < 75 MHz	—	20	—	18	—	15		
75 MHz \leq Fo < 133 MHz	—	35	—	30	—	25		
133 MHz \leq Fo	—	45	—	40	—	—		
Output Level (CMOS)	Output High (Logic "1")	2.97	—	2.25	—	1.62	—	V
	Output Low (Logic "0")	—	0.33	—	0.25	—	0.18	
Transition Time:Rise/Fall Time	13.7 kHz \leq Fo \leq 70 kHz 0.3125 MHz \leq Fo < 100 MHz 100 MHz \leq Fo							
13.7 kHz \leq Fo \leq 70 kHz	—	50	—	50	—	50	nSec	
0.3125 MHz \leq Fo < 100 MHz	—	5	—	5	—	5		
100 MHz \leq Fo	—	3	—	3	—	3		
Start Time	—	5	—	5	—	5	mSec	
Output Drive Capability (CL)	—	15	—	15	—	15	pF	
Tri-State (Input to Pin1)	Enable (High voltage or floating)	2.31	—	1.75	—	1.26	—	V
	Disable (Low voltage or GND)	—	0.99	—	0.75	—	0.54	
Period Jitter(Pk-Pk)	—	40	—	40	—	40	pSec	
RMS Phase Jitter (Integrated 12 kHz~20 MHz)	—	1	—	1	—	1	pSec	
Standby Current	—	10	—	10	—	10	μ A	
Aging (@ 25°C 1st year)	—	± 3	—	± 3	—	± 3	ppm	
Storage Temp. Range	-55	125	-55	125	-55	125	°C	

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

+ Transition times are measured between 10% and 90% of VDD, with an output load of 15pF.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm	±20	±25	±50
-10 ~ +60	○	○	○	○
-20 ~ +70	△	○	○	○
-40 ~ +85	△	○	○	○
-40 ~ +125	×	×	○	○

* ○: Available △:Conditional X: Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration