

## CMC503-SERIES




- Ultra low phase jitter: 0.5ps ( 12 kHz to 20MHz )
- LVCMOS/ LVTTTL compatible output
- SMD package 5.0 x 3.2 mm

### ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Frequency Range	$f_0$	Any Frequency between Frequency range, accurate to 6 decimal places	1		80	MHz
Supply Voltage	$V_s$	Supply voltages between 2.5V and 3.3V can be supported in increments of 0.1V	1.71 2.25 2.52 2.97	1.8 2.5 2.8 3.3	1.89 2.75 3.08 3.63	V V V V
Supply Current	$I_s$	$V_s = 1.8V, f_0=20MHz$ , no load condition $V_s = 2.5V, 2.8V$ and $3.3V f_0=20MHz$ , no load condition		29 31	31 33	mA mA
Operating Temperature	$T_a$	Extended Commercial Industrial	-20 -40		+70 +85	°C °C
Frequency Stability	$\Delta f/f_0$	Including First Year aging, initial frequency tolerance at 25°C, Frequency stability over temperature range, supply variation, load variation	-10 -20 -25 -50		+10 +20 +25 +50	ppm ppm ppm ppm
Long term stability, aging	$\Delta f/\Delta t_y$ $\Delta f/\Delta t_y$	First year 10 years	-1.5 -5.0		1.5 5.0	ppm ppm
Enable / Disable Time	$T_{E/D}$	$f_0=80MHz$ , for other frequencies, $T_{E/D}=100ns+3$ cycles			150	ms
Enable / Disable Current	$I_{E/D}$	$V_s=1.8V, E/D=GND$ , output is weakly pulled down $V_s=2.5V, 2.8V$ or $3.3V, E/D=GND$ output is weakly pulled down			30 31	mA mA
Standby Current	$I_{sby}$	STBY=GND, $V_s=1.8V$ STBY=GND, $V_s=2.5V, 2.8V$ or $3.3V$ Output is weakly pulled down			10 70	$\mu A$ $\mu A$
Startup Time	$T_{ST}$	Measured from the time $V_s$ reaches its rated minimum value		7	10	ms
Resume Time	$T_{res}$	Measured from the time STBY pin crosses 50% threshold		6	10	ms
Rise/ Fall Time	$T_r / T_f$	$C_L = 15pF, 10\% - 90\% V_s$		1.5	2.0	ns
RMS Phase Jitter	$J_{PH}$	$f_0=10MHz, BW 12KHz$ to $20MHz$		0.5	1.0	ps
RMS Period Jitter	$J_P$	$f_0=75 MHz, V_s=2.5V, 2.8V$ or $3.3V$ $f_0=75 MHz, V_s=1.8V$		1.5 2.0	2.0 3.0	ps ps
Input Voltage High	$V_{IH}$	Pin 1, E/D or STBY	70%			Vs
Input Voltage Low	$V_{IL}$	Pin 1, E/D or STBY			30%	Vs
Input pull-up impedance	$Z_{in}$	Pin 1 E/D High or Low, STBY= High STBY = Low	2	100	250	k $\Omega$ M $\Omega$

**CMC503-SERIES**

MECHANICAL DIMENSIONS AND PIN FUNCTIONING

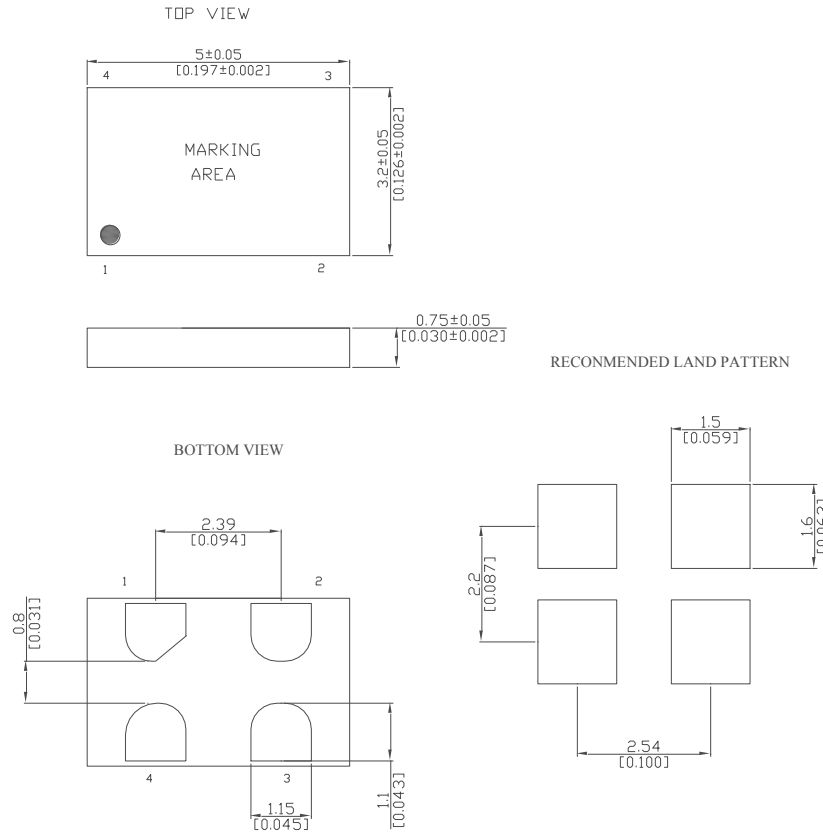

PIN	SYMBOL	FUNCTION
1	E/D/STBY	<b>E/D</b> H or Open* :Enable output frequency L :Disable output frequency , high impedance <b>STBY</b> H or Open* : Enable output frequency L : Output is low ( weak pull down) Device goes to sleep mode. Supply current ( Is ) reduces to Istby
2	GND	Electrical Ground
3	OUTPUT	Output Signal
4	Vs	Supply Voltage