

## CMP501-SERIES



- 1 to 220 MHz High Performance
- LVPECL/ HCSL / LVDS / CML output
- High frequency stability
- SMD package 5.0 x 3.2 mm

### ELECTRICAL SPECIFICATIONS


PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Frequency Range	$f_0$		1.0		220	MHz
Supply Voltage	Vs	Vs=+1.8V±5% is only for CML	1.8		3.3	V
Operating Temperature	Ta		0 -20 -40		+70 +70 +85	°C °C °C
Frequency Stability	$\Delta f/f_0$	Including First Year aging, initial frequency tolerance at 25°C, Frequency stability over temperature range, supply variation, load variation	-10 -15 -20 -25 -50		+10 +15 +20 +25 +50	ppm ppm ppm ppm ppm
Enable / Disable/ Standby Function Pin1	E/D/STBY	Enable = High or open ( OUT+ and OUT- output signals active ) Disable = Low or GND ( OUT+ and OUT- outputs high impedance ) Standby= High or open ( OUT+ and OUT- output signals active ) Standby = Low or GND ( OUT+ and OUT- output is low, weak pulled down, oscillator stops )				
Input High Voltage	V <sub>IH</sub>		70%Vs			V
Input Low Voltage	V <sub>IL</sub>				30%Vs	V
Input High current	I <sub>IH</sub>	E/D or STBY pin			10	μA
Input Low current	I <sub>IL</sub>	E/D or STBY pin	-10			μA
Power up Time	T <sub>PW</sub>	Time from minimum power supply voltage to the first cycle			10	ms
Long Term Stability ( Aging )	$\Delta f_0/\Delta t$	Ta=25°C, first year	-1		1	ppm




**CMP501-SERIES**

**MECHANICAL DIMENSIONS AND PIN FUNCTIONING**


TOP VIEW



RECOMMENDED LAND PATTERN



BOTTOM VIEW

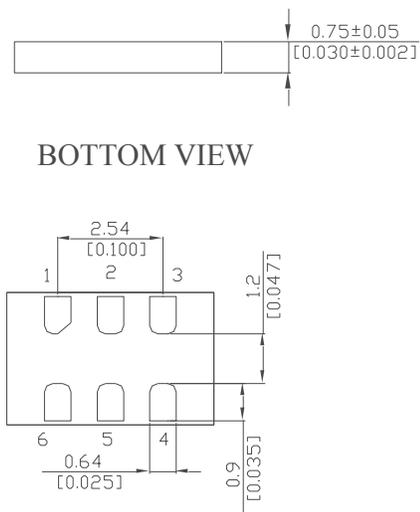

PIN	SYMBOL	FUNCTION
1	E/D/STBY	E/D : High or open, OUT+ and OUT- active Low , OUT+ and OUT- High impedance state STBY: High or open, OUT+ and OUT- active Low , OUT+ and OUT- is low ( weak pull down ), oscillator stops
2	NC	Do not connect pin, leave it floating
3	GND	Electrical Ground
4	OUT+	Output Signal
5	OUT-	Complementary Output Signal
6	Vs	Supply Voltage